


DIST.

A TERMINI DI LEGGE E' VIETATA LA RIPRODUZIONE O LA NOTIFICAZIONE DI QUESTO DISEGNO A TERZI SENZA AUTORIZZAZIONE

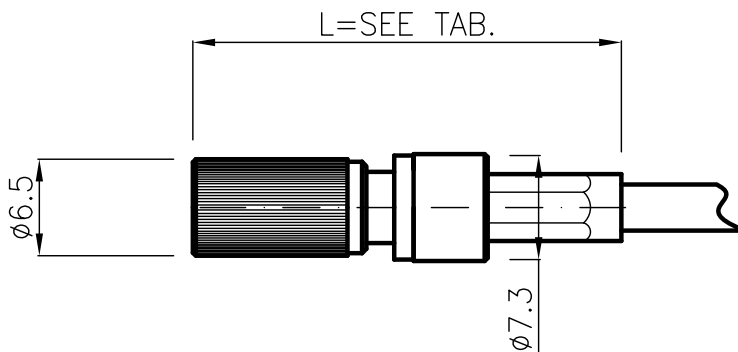

**SPECIFICATIONS**

Mating and dimensions as per CEI CECC EN 122230 Type A

**MATERIALS AND FINISH**

Body	CW 614 N ( UNI EN 12164)	Ni
Plug inner contact	CW 614 N ( UNI EN 12164)	Au
Outer plug contact	Beryllium copper	Au
Insulators	Teflon (PTFE)	
Crimping ferrules	Soft copper	Ni
Other metal parts	CW 614 N ( UNI EN 12164)	Ni

CODE	CABLE	L =mm	IMPED. Ohm	CRIMP. OR SOLDER	CRIMP. FERRULE	ASSEMBLY INSTRUCTIONS
BSD.52.001	2YCCY 0,5/2,9 (ST121)	29	75	1.2	5.41	B1/12
BSD.52.002	RG 179 B/U RG 187 B/U RG 188 A/U RG 316 U	27.5	50/75	Solder	3.2	B1/1-1
BSD.52.003	2YCCY 0,4/2,5	27.5	50/75	Solder	5.41	B1/1-5
BSD.52.004	ST 212 R1-T 2,0 LI-75K	27.5	50/75	Solder	3.8	B1/1-2
BSD.52.005	2YCY 0,4/2,5	29	75	1.2	4.52	B1/12
BSD.52.006	ST 214 R1-T 3,7 LI-75K	32	75	1.2	6.8	B1/13
BSD.52.007	BT3002	32	75	1.2	4.06	B1/12

MOD. 101

DENOMINAZIONE		
50/75 Ohm - 1.0/2.3 SERIES COAXIAL CONNECTOR STRAIGHT PLUG WITH SOLDER CRIMP AND FULL-CRIMP		
SCALA	2:1	CONTR.
ISSUED	27.04.00	DATA
REV.	N° MOD.	DATA
FILE	BSD52XXC	APPROV. A.Q.
		DIS.



N° CODICE  
**BSD.52.0XX**