


DIST.

A TERMINI DI LEGGE E' VIETATA LA RIPRODUZIONE O LA NOTIFICAZIONE DI QUESTO DISEGNO A TERZI SENZA AUTORIZZAZIONE

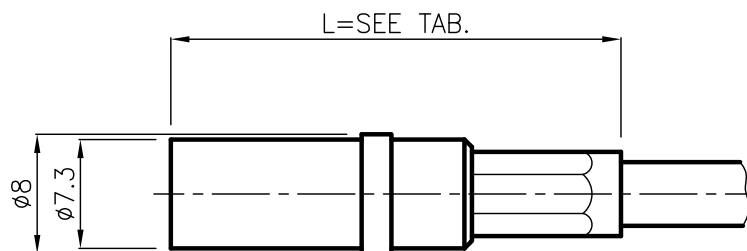

### SPECIFICATIONS

Mating and dimensions as per CEI CECC EN 122230 Type B

### MATERIALS AND FINISH

Body	CW 614 N ( UNI EN 12164 )	Au
Plug inner contact	CW 614 N ( UNI EN 12164 )	Au
Outer plug contact	Beryllium copper	Au
Insulator	Teflon (PTFE)	
Other metal parts	CW 614 N ( UNI EN 12164 )	Ni
Crimping ferrules	Soft copper	Ni

CODE	CABLE	L=mm	ASSEMBLY INSTRUCTIONS
BSD.57.701	ST 212 ; R1-T 2.0 LI-75K	30.2	B1/6
BSD.57.702	ST 214 ; R1-T 3.7 LI-75K	33.2	B1/7
BSD.57.703	BT 3002 ; EV1CH 0.315/1.95	30.2	B1/6
BSD.57.704	BT 2002	33.2	B1/7
BSD.57.705	ST 121	30.2	B1/6
BSD.57.706	BT 2003	33.2	B1/7
BSD.57.707	RG 179B/U ; RG 187A/U	30.2	B1/6

CRIMPING TOOL CODE : CMC.702/XX

NOTE STANDARD PACKING 100 PCS./BAG

DENOMINAZIONE

75 Ohm 1.0/2.3 SERIES COAXIAL CONNECTOR  
STRAIGHT PLUG WITH FULL CRIMP ATTACHMENT  
CABLE (SNAP-ON COUPLING)



SCALA 2 : 1

CONTR.

DATA 22.11.94

N° CODICE

ISSUED 22.11.94

FILE BSD577XC

APPROV.  
A.Q.

DIS.

**BSD.57.7XX**