


PANEL CUTOUT DIMENSION

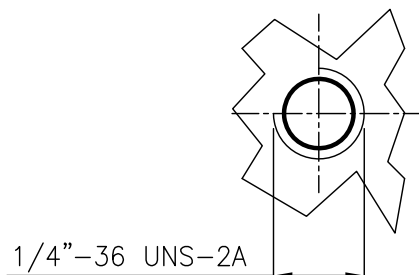


SPECIFICATIONS

Mating and dimensions as per CECC 22110

MATERIALS AND FINISH

P.N. SUFFIX	Body and locknut	Socket inner contact
004	Brass Au	Beryllium copper Au
204	Stainless steel passivated	Beryllium copper Au
304	Stainless steel Au	Beryllium copper Au
504	Brass White Bronze	Beryllium copper Au

CAPTIVATED CONTACT

			DENOMINAZIONE 50 Ohm - SMA SERIES COAXIAL CONNECTOR BULKHEAD STRAIGHT SOCKET WITH SOLDER TERMINAL			 CM S.r.l. -ITALY-	
			SCALA 2:1	CONTR.	DATA 17.05.00	N° CODICE	
REV. Q1	N° MOD. LORENZON	DATA 02.08.10	FILE DPD0104C-1	APPROV. A.Q.	DIS.	DPD.01.XX4	

DIST.

A TERMINI DI LEGGE E' VIETATA LA RIPRODUZIONE O LA NOTIFICAZIONE DI QUESTO DISEGNO A TERZI SENZA AUTORIZZAZIONE SCRITTA.

MOD. 101C